




## Fastening distribution

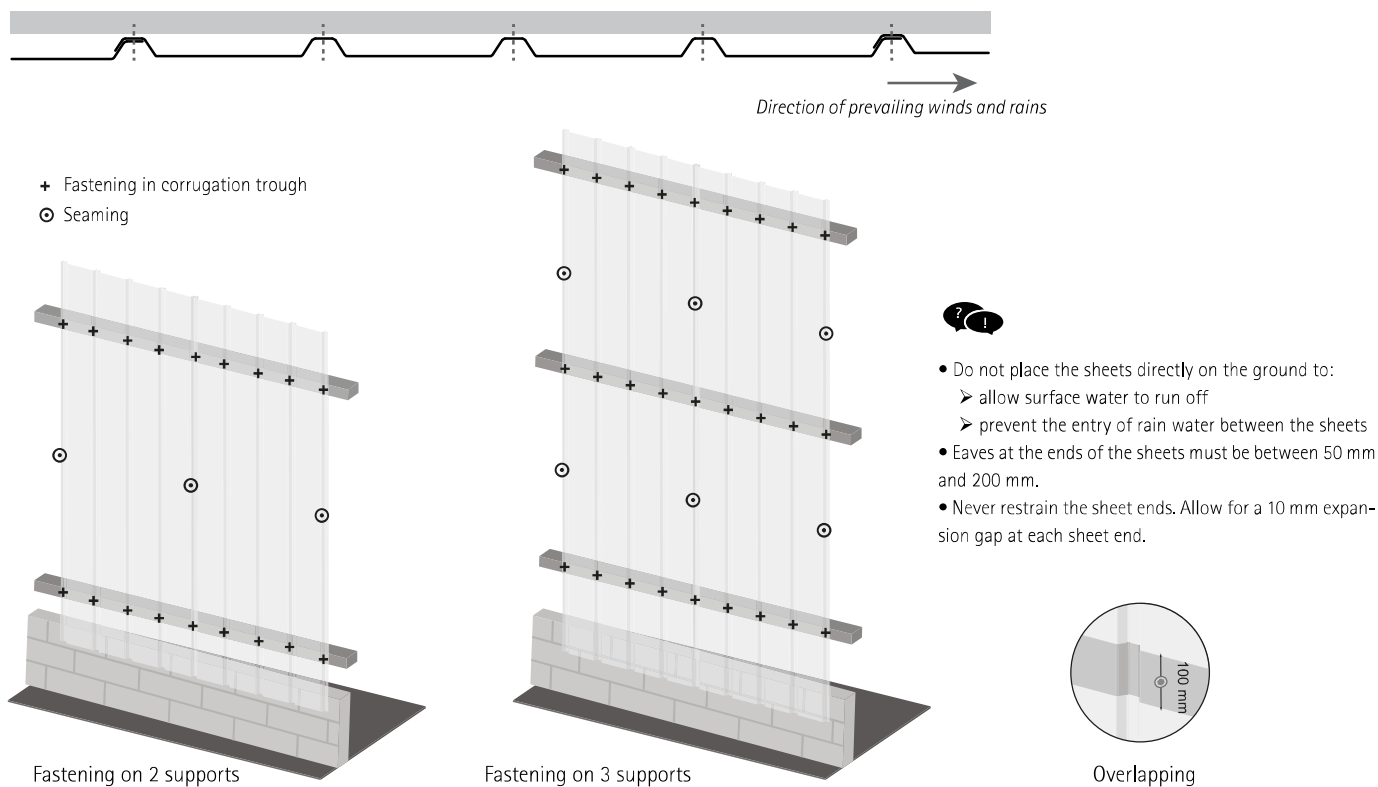

## Recommended gap between purlins (m)

Upward loads (wind depression) daN/m <sup>2</sup>	Max. gap between purlins (m) Deflection 1/50		Max. gap between purlins (m) Deflection 1/100	
	2 supports	3 supports	2 supports	3 supports
50	1.37	1.50	1.16	1.30
60	1.27	1.44	1.07	1.21
80	1.20	1.35	0.97	1.08
100	1.12	1.26	0.85	0.96
120	1.06	1.20	0.75	0.84
140	0.99	1.12	0.66	0.74
160	0.94	1.05	0.64	0.72

### CAUTION

→ FOR COUNTRIES OTHER THAN FRANCE, check the admissible loads according to the calculated spans and applicable regulatory standards in the country in which the building will be constructed.

→ This synoptic data sheet is not intended to replace a more technical documentation or technical certification with installing instructions. For further information, please contact our technical support on +33 3 80 46 80 52

